

Automatic Traffic Light Control for Emergency Vehicle Using Fuzzy Logic

H. S. Shukla and Jitesh P. Tripathi

Department of Mathematics and Statistics

DDU Gorakhpur University, INDIA

E-mail: jiteshmaths@gmail.com

(Received January 6, 2012)

Abstract: In this paper we presents an application of fuzzy logic traffic control for emergency vehicle using wireless sensors to overcome problems like congestion, accidents, speed and traffic irregularity. The proposed approach can provide a preferred solution by minimizing the vehicle waiting time especially the emergency vehicles using fuzzy logic control under situations that normally occur during emergency. The effectiveness of this approach is tested by taking two traffic junctions.

Keywords: Emergency vehicle, FPGA, GPS, Light control system.

2000 Mathematics Subject Classification No.: 91B06

1. Introduction

Urban areas nowadays have a great deal of traffic jams especially when a number of junctions are taken into consideration. Air and noise pollutions, economic loss, accidents, time wastage and so many other factors are of serious concerns in traffic. There are many other methods of controlling traffic lights in junctions to minimize the amount of traffic. Traffic can be detected by traffic light controller intelligently^{1,2}. The use of fuzzy logic control in traffic signals are essential and plays an important role, however, when network intersections are concerned, the control problem occurs which is an important issue in traffic engineering³. S. Coleri, S. Y. Cheung and P. Varaiya et al discussed the various sensor networks for monitoring traffic⁴. I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, worked on a survey on sensor networks used for traffic control system⁵. A. N. Knaian developed a wireless sensor network system for smart roadbeds and intelligent transportation using wireless sensor package to instrument roadways for Intelligent Transportation Systems. The sensor package counted passing vehicles, measured the average roadway speed, and detected ice and water on the road. Clusters of sensors can transmit this

information in near real-time to wired base stations for use, controlling and predicting traffic, and in clearing road hazards⁶. W. J. Chen, et al proposed a real time dynamic traffic control system based on wireless sensor network⁷. M. Tubaishat, et al developed an adaptive traffic light control with wireless sensor networks and discussed various scenarios⁸. Y. Lai, et al discussed the protocols for traffic safety using wireless sensor network and described the design and implementation of energy-efficient protocols that can be used to improve traffic for an intelligent traffic management system deploying low-cost wireless sensor nodes on the roadbed and worked collaboratively to detect potential collisions on the road⁹. In this proposed research work, two junctions are discussed and brought into focus along with the use of wireless sensors as many studies suggest the use of sensors. There are no traffic lights control system in these junctions and huge amount of traffic causing wait time and accidents. As a result, physical existence of traffic police is always required there which is inappropriate due to availability of technology today. Also, due to heavy traffic in these two junctions, emergency vehicles face hardships when they pass from there. The two junctions have been divided into different directions and separations with installation of traffic lights control system and wireless sensors. Regarding traffic flow conditions on these junctions, per minute minimum 50 and maximum 115 vehicles passes by. The proposed Traffic Lights Control System uses Fuzzy logic Control system to overcome problems like congestion, accidents and speed to minimize the vehicles waiting time especially under emergency conditions. The framework of this paper consists of: overview of traffic lights control system in section 2, in section 3 design model of fuzzy logic based traffic control system is discussed, in section 4 design algorithm of fuzzy based traffic system is discussed, in section 5, simulation results are discussed and in section 6, conclusion results are discussed.

2. Overview of Traffic Lights Control System for Emergency Vehicles

For inputs, three emergency vehicles have been taken that include police, ambulance and fire brigade vehicles. Upon arriving, they will set their route on Global Positioning System (GPS) first, which will be located in their vehicles. Once the route is set, they will start moving on their proposed route while switching on their emergency lights and specific emergency siren. Sensors will be located at a specific distance before the junctions which will detect the speed and sound waves of siren at a particular threshold. Based on the speed, sensors will communicate wirelessly with the traffic control system of the two junctions while

realizing their routes. On that basis traffic control systems of the two junctions will be able to minimize the traffic flow by inter-communication thus assigning the right time for red and green lights so that emergency vehicles can pass quickly. Fig.1 shows the block diagram of emergency vehicles based traffic control system. In case of more than one emergency vehicle coming from different directions, the traffic control system will be able to avoid collisions.

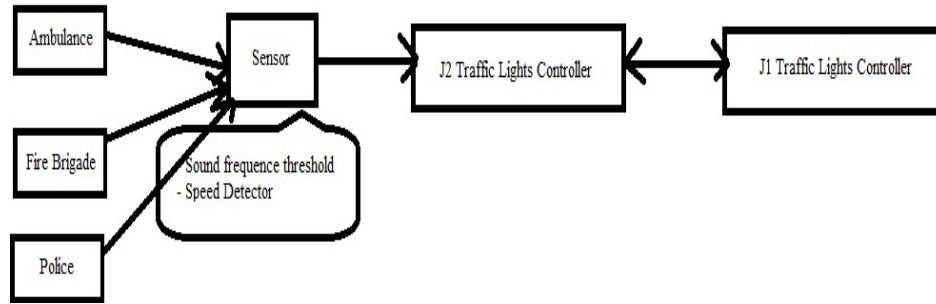


Fig.1.The proposed System

3. Design Model Of Fuzzy Logic Based Traffic Control System

The two junctions have been categorized as J1 and J2 as shown in Fig. 2. Wireless sensors S1, S2 and S3 have been used which are installed 500m away from the junctions. We are considering three emergency vehicles, ambulance, police and fire brigade, coming from three different directions at the same time with different speed ratio. Based on their speed detected by the sensors, two actions are performed. One, traffic flow is minimized on their routes so that they can pass by with their maximum possible speed and secondly, their collisions are avoided. In this scenario, first we consider an ambulance coming from the left side of Junction J1 having its route defined straight ahead. It will pass through roadways W1 and W7 with road codes 00001 and 00004 respectively. Secondly, we consider a police vehicle coming towards junction J1 having its route defined and will pass through roadways W3 and W7 having road codes 00002 and 00004 respectively. Finally, we consider a fire brigade vehicle coming from the right side of junction J2 having its route defined and will pass through the road ways W11 and W5 having road codes 00006 and 00003 respectively. Also, the speed of ambulance is detected by the sensor S1 which is 80 km/h, the speed of police vehicle is detected by sensor S2 which is 60 km/h and the speed of fire brigade is detected by sensor S3 which is 40 km/h. Each of these

wireless sensors has been installed at 500m away from the junctions. However, the total distance between sensors S1 and S3 is 1.5 km. The expected time of these emergency vehicles are found with the help of the following formula:

$$\text{Distance (s)} = \text{Velocity (v)} \times \text{Time (t)}$$

Or

$$\text{Velocity (v)} = \text{Distance (s)} / \text{Time (t)}$$

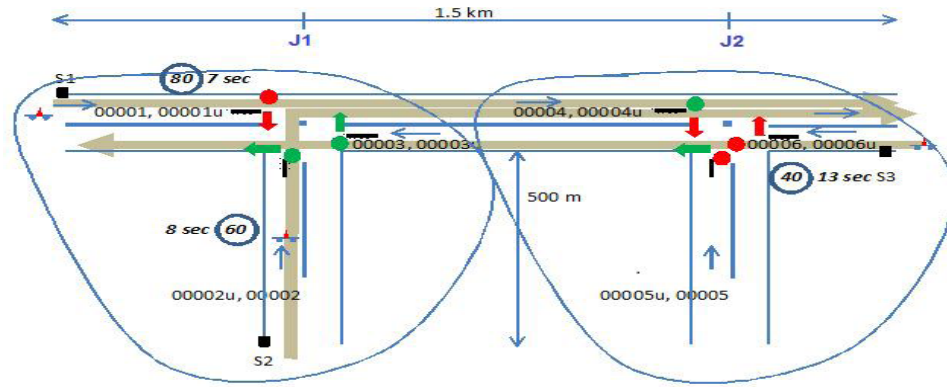


Fig.2. The proposed scenario of the two junctions

4. Design Algorithm of Fuzzy Based Traffic System

The data at junction J1 containing sensors, traffic flow, road ways and traffic light status which is G for green and R for red are given in Table 1, however, yellow light has been ignored as it is marginal in this case and our main focus is on the green time to move the traffic as much as possible during the arrival of emergency vehicles.

Table 1: Data of Junction J1

Junction	J1					
Sensor	S1		S2			
Traffic Flow	100		60		95	
Road Ways	W1	W2	W3	W4	W5	W6
Traffic Light Status G= Green	G	G	R	G	R	R
	G	G	R	G	R	R
	R	R	G	G	G	G

Y= Yellow R= Red	R	R	G	G	G	G
---------------------	---	---	---	---	---	---

Table 2 shows the data at junction J2 containing sensors, traffic flow, road ways and traffic light status which is again G for green and R for red.

Table 2: Data of Junction J2

Junction	J2					
Sensor					S3	
Traffic Flow	115		50		80	
Road Ways	W7	W8	W9	W10	W11	W12
Traffic Light Status	G	G	R	G	R	R
G= Green	G	G	R	G	R	R
Y= Yellow	G	G	R	G	R	R
R= Red	G	G	R	G	R	R

As each road has been assigned a special code, for u-turn here is 'u' written after the code, however, without the term 'u' means straight path. Also, categorization in the form of roadways and road codes has been defined in Table 3.

Table 3: Roadways with their Respective Roadcodes

Road Ways	Road Codes
W1	00001
W2	00001 u
W3	00002
W4	00002 u
W5	00003
W6	00003 u
W7	00004
W8	00004 u
W9	00005
W10	00005 u
W11	00006
W12	00006 u

The code 00001 for instance contains five digits in which the first digit defines the existence of emergency vehicle. It is basically ON and OFF. If the code is in the form 00001, it means no emergency vehicle is detected whereas the code 10001 means that we have an emergency vehicle on this route. The second digit defines the existence of ON and OFF of traffic light, which is 1 for green and 0 for red. For instance, the code 00001 means traffic light status is red on that route and 01001 means traffic light status is green on that particular route. In case of emergency vehicle coming towards the road having code 00001 for instance will be of the form 11001 which again indicates the existence of emergency vehicle on the route and traffic light signal status which is green. Upon getting all those relevant data, simulation software MATLAB is used for fuzzy control. Membership functions for both inputs and outputs have been defined in Table 4 and Table 5.

Table 4: Input Member Functions

0-20	Slow
0-40	Below Medium
20-60	Medium Fast
40-80	Fast
60-100	Very Fast

Table 5: Output Member Functions

0-20	Very Long
0-40	Long
20-60	Medium
40-80	Short
60-100	Very Short

Three inputs in the form of ambulance, police and fire brigade vehicles with their green time as their outputs are shown in Fig. 3.

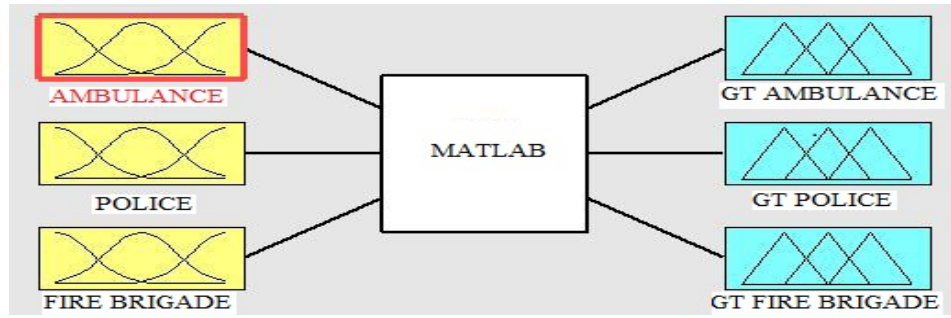


Fig.3. Inputs and outputs

Five membership functions for each of input and output have been created. Fig. 4 shows the membership functions for input variable “Ambulance”.

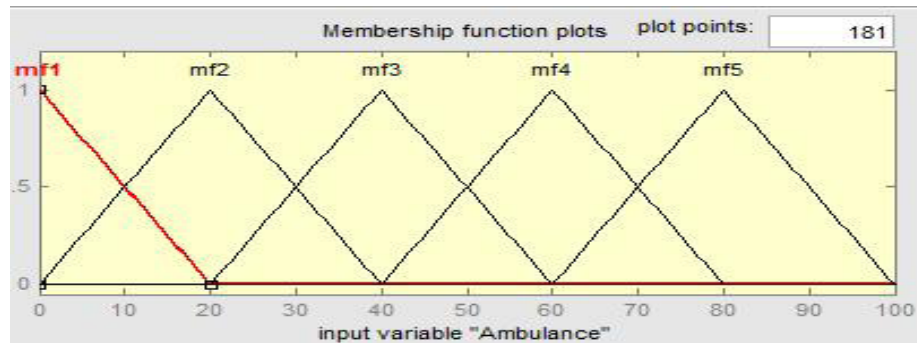


Fig.4. Membership functions with their respective range

A total of 60 rules have been generated. Rules were defined first by considering a single emergency vehicle with all possible speeds. Rules were then defined by considering two emergency vehicles with all possible speeds and finally, rules were defined for three emergency vehicles with all possible speeds. Moreover, by assigning the speed of our inputs, the rule viewer shows the respective green time for our outputs.

5. Simulation Results and Discussion

Simulation software MATLAB generated rules in rule viewer shown in Fig. 5 on the basis of our data and finally surface view has been generated. Two surface views has been shown here that indicates the effect of output. Fig. 6 shows a graph between the inputs: Ambulance and Police vehicles and output: Green time for ambulance. Fig. 7 shows a graph between the inputs: Ambulance and Fire brigade vehicles and output: Green time for ambulance.

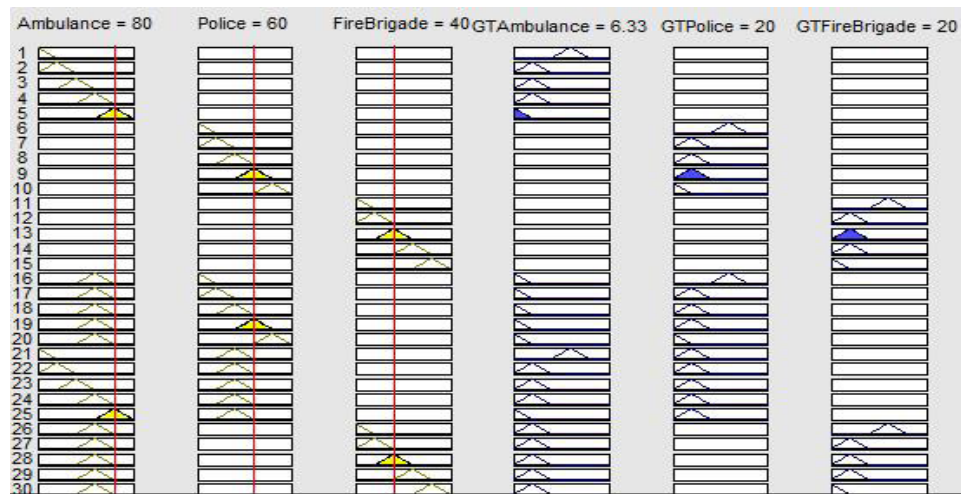


Fig.5. MATLAB Rule Viewer

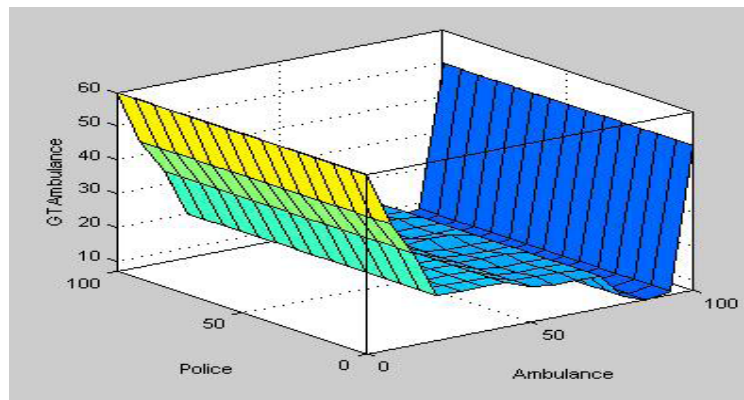


Fig.6. Surface View for Ambulance and Police Vehicles

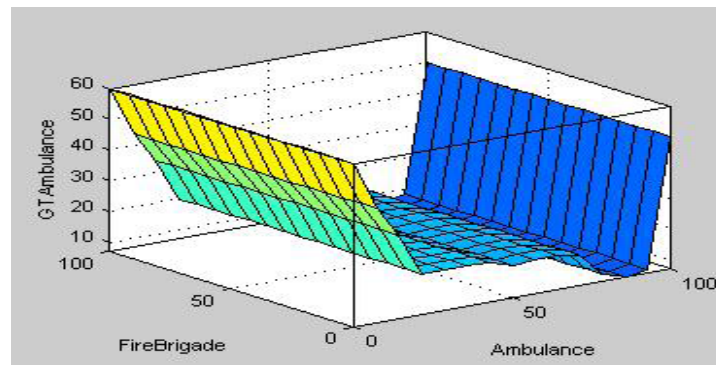


Fig.7. Surface View for Ambulance and Fire Brigade Vehicles

6. Conclusion Results and Discussion

Using proper data collection for the two junctions and proposing a traffic control system for emergency vehicles, the emergency vehicles passes from these two junctions quickly facing less traffic and at the same time collisions are avoided in case of multiple emergency vehicles coming from different directions.

In case of new emerging algorithms and hardware technology, the proposed system will be flexible enough to be enhanced in order to handle future traffic aspects using FPGAs based Microelectronics chips to control traffic signals.

References

1. Cheonshik Kim and You-Sik Hong, Traffic signal using smart agent system, *American Journal of Applied Sciences* (2008) 1487-1493.
2. Tzafestas et al, *Advances in Intelligent Autonomous Systems: Microprocessor based and Intelligent Systems Engineering* Kulwer Academic Publishers 1999.
3. W. Skowronski and L. Shaw, Self-learning fuzzy traffic controller for a traffic junction. I., *European Congress on Intelligent Techniques and Soft Computing-EUFIT 93*, Aachen, Germany (1993) 751-761.
4. S. Coleri, S. Y. Cheung and P. Varaiya, Sensor networks for monitoring traffic, *Proceedings of the 42nd Annual Allerton Conference on Communication, Control and Computing* (2004) 32-40.
5. I. F. Akyildiz, W. Su, Y. Sankarasubramaniam and E. Cayirci, A survey on sensor networks, *IEEE Communications Magazine*, **40** (2002) 102-114.
6. A. N. Knaian, A wireless sensor network for smart roadbeds and intelligent transportation systems, *Technical Report, Electrical Science and Engineering*, Massachusetts Institute of Technology, June 2000.
7. W. J. Chen, L. F. Chen, Z. L. Chen and S. L. Tu, A real time dynamic traffic control system based on wireless sensor network, *Proceedings of the 2005 International Conference on Parallel Processing Workshops*, **14** (2005) 258-264.
8. M. Tubaishat, Y. Shang, and H. Shi, Adaptive traffic light control with wireless sensor networks, *Proceedings of IEEE Consumer Communications and Networking Conference*, (2007) 187-191.
9. Y. Lai, Y. Zheng and J. Cao Protocols for traffic safety using wireless sensor network, *Lecture Notes in Computer Science*, **4494** (2007) 37-48.