

Tungsten-Based Broadband Perfect Metamaterial Absorber in Visible to Near-Infrared Region for Solar Cell Applications

Raj Kumar and Praveen C Pandey

Department of Physics,
Indian Institute of Technology (BHU), Varanasi, U.P 221005, India
Email: pcpandey.app@iitbhu.ac.in

Bipin K Singh

Department of Physics, University of Mumbai, Mumbai 400098, India

(Received July 01, 2021)

Abstract: Utilizing the solar radiations mainly concentrated in the optical region requires the perfect absorption of light by photovoltaic cells. In this paper, we have demonstrated a broadband perfect metamaterial absorber (PMA) based on tungsten (W) metal in the Visible to Near-Infrared region. The proposed metamaterial absorber has 98% average absorbance for 375-1100 nm wavelength region. A very large absorption bandwidth over 90% is obtained, and the maximum absorption is around the unity. Perfect absorption (>99%) was found between the 422 to 962 nm range of the proposed absorber. The polarization-insensitive-based proposed absorber tolerates a large incident for both transverse magnetic (TM) and transverse electric (TE) modes. Moreover, we have investigated the optimization of the geometric parameters of the unit cell to gain the best absorption results. The improved conversion efficiency under the solar radiation ($A_{AM1.5}$) has been investigated and also calculated the short circuit density. The proposed broadband PMA shows a promising expectance in various applications such as solar energy harvesting, solar cell, thermal imaging, photodetectors, and durable optoelectronics devices.

Keywords: Metamaterial; Perfect Absorber; Plasmon; Short circuit current density.

1. Introduction

In recent years, Metamaterials (MMs) have attracted considerable attraction due to their incredible performance to change and manipulate the incident EM waves which motivated the researchers to focus on the

metamaterial for different applications.. The first metamaterial absorber (MMA) was investigated by Landy et al. in 2008. MM is an artificial material with a sub-wavelength metal-dielectric structure. The properties like effective permittivity $\epsilon(\omega)$, permeability $\mu(\omega)$, and refractive index (n) of metamaterials have negative values¹⁻². Metamaterials are used across various frequency regions such as gigahertz, terahertz, and optical for many purposes such as antenna³, detector⁴, sensors⁵, energy harvesting⁶, and perfect absorptions⁷. Metamaterials show perfect absorption in particular range of frequency, which prefers some additional applications such as solar thermophotovoltaics⁸, thermal emitters⁹, photodetectors¹⁰. Metamaterial absorbers have generally consisted of two-layer^{11,12}, three-layer¹³⁻¹⁷, four-layer¹⁸, and multilayers¹⁹, but most of the commonly used metamaterials have three-layer (metal-dielectric-metal) structure. The dielectric layer absorbs the incident light and generates the coupling capacitance between the resonator and metal layers. The plasmonic resonance of the GaAs plane and the symmetrical structure are also reasons for large absorption. However, the impedance of metamaterial match with free space is the main reason for near-perfect absorption. These properties are utilized to obtain electrical energy by utilizing electromagnetic energy and used in thermo-photovoltaic devices such as absorber, emitter²⁰, photodiode²¹, etc. It is recently reported that solar radiation could be captured by the metamaterial and improves the efficiency of the photovoltaic devices. Mostly the solar spectrum covered the optical region from 400 nm to 750 nm wavelengths. Therefore, we need high absorption for the solar cells and a suitable MM provides the maximum absorption in this range, which can be utilized for energy harvesting applications. Recently, several MPAs have been provided the single-band²², dual-band²³, multi-band²⁴, and broadband²⁵ absorber to improve the energy harvesting in the solar cell.

The earth contains solar energy within different radiation forms, which are visible (48%), infrared (43%), and ultraviolet (7.5%). The visible and infrared radiations are mostly used for potential applications such as solar cells which provide the maximum current at the output. The high transmission and large reflections reduce the conversion efficiency of a solar cell. Most of the reported absorbers covered only some portion of visible light and show the minimum conversion efficiency is not suitable for that application²⁶. Moreover, the short circuit current density (J_{sc}) is another characteristic of global performance that plays a crucial role in solar cell characteristics. Recently reported research papers, J_{sc} has been investigated with different thicknesses of the dielectric layer that shows the

J_{sc} in visible to near-infrared range under the AM1.5 solar illuminations²⁷. We require the large J_{sc} and high solar energy trapping on the absorber which should be near-unity due to multiple coupling of resonances for potential applications. Our purpose is to improve the conversion efficiency and short circuit current density for solar cells.

In this paper, we proposed a perfect broadband absorber composed of the dielectric material of gallium arsenide (GaAs) and tungsten (W) metal (refractory). The structural absorber consists of three layers, in which the top and bottom layers are made of W metal, and the ultrathin intermediate layer is made of GaAs. The range of 375-1100 nm exhibits a broadband absorbance with a large bandwidth (725 nm) and achieved an average absorbance of over 98% . The reason for selecting the tungsten metal is because it has a high melting point (3422 °C), withstands high temperatures, and matched the impedance with free space. The proposed geometrical structure is generated by the plasmonic resonance characteristics for the whole spectrum. The absorption characteristics also investigated different geometric and material parameters of the structures. Near unity, the real part of the impedance is the main reason to exhibit higher design structure absorption. Moreover, we have also investigated the effect of incident angles for TE and TM modes on the proposed structure's absorption. The proposed absorber is capable to improve conversion efficiency under the solar spectrum of solar cells and demonstrated the large value of conversion efficiency ($A_{AM1.5}$). We obtained the high short circuit density ($J_{sc} \sim 41.28 \text{ mA/cm}^2$) under the AM1.5 solar illumination and this absorber achieved a broadband wavelength range due to the multiple resonance coupling and also obtained near-unity solar energy. It can be widely used for thin-film solar cells, solar energy harvesting, and thermal emitters.

2. Materials and Methods

Fig.1 (a) shows the proposed PMA consisting of three basic layers: (i) bottom metallic layer with the thickness (h_1), (ii) a dielectric spacer with the thickness (h_2), and (iii) metallic resonators with the thickness (t). The value of all parameters is shown in Table 1. The structure has two parts of metal layers whereas the dielectric layer is made up of Gallium Arsenide (GaAs), and both metal layers are made up of Tungsten (W). The GaAs is chosen because it has some vital advantages, such as high-efficiency, high electron velocity and mobility, low-temperature coefficient, low light performance, and flexibility, etc. GaAs have a direct bandgap that

formation a good solar energy absorber. The GaAs also provide a good melting point in which property is desired for the dielectric layer as well²⁸. The description of GaAs are $\epsilon = 12.94$, $\tan\delta = 0.006$, $\rho = 5320 \text{ [kg/m}^3\text{]}$ and the thermal conductivity (K) = 54 [W/K/m]. To obtain better efficiency in the solar thermo-photovoltaics (STPVs) require the higher temperature capability of the absorber. It is possible by the bottom layer of the absorber because tungsten metal has a high melting point (3422 °C) which provides high thermal stability with the absorber. When the light beam hits on the hot layer then it absorbs a large quantity of the energy with the help of temperature difference. The melting point of the tungsten will withstand the higher energy. The increased stability of the absorber can be used in terrestrial applications. In the simulation process, the optical properties of tungsten metal (optical Palik) were taken from reference²⁹. The main reason for choosing tungsten metal for the resonator and ground layer is because it is capable to match the high impedance with free space. This metal can improve the absorption spectra and decrease the transmission and reflection near to zero because it has high intrinsic losses.

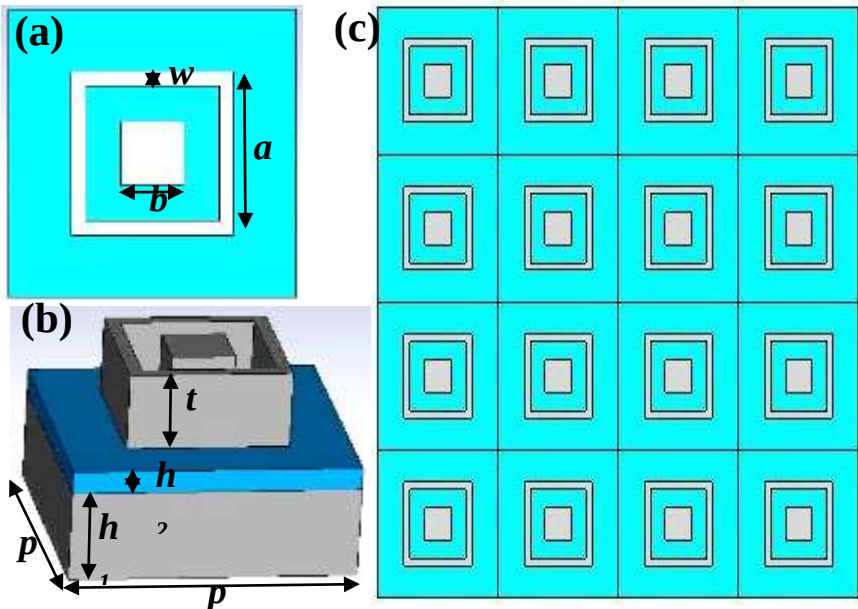


Figure 1. (a) A front view of the absorber, (b) A schematic design of the proposed absorber, (c) Unit cells structure in periodic range.

Table 1. Respective Values (nm) of the proposed absorber

Parameter	p	h_1	h_2	t	a	b	w
Value (nm)	610	200	28	170	344	134	60

S-parameters help to obtain the desired absorption level. It is essential to have convenient boundary conditions with the correct simulation setup. In this design, we have used the periodic boundary conditions in the x and y-direction, respectively. The propagation wave source is always passed through the z-direction and considers the perfectly matched layer (PML) with open spaces in the negative direction, which works as abolish scattering. In this method, the simulation software analyzer just repeats unit cell geometry in the same dimension and orientation to make a periodic array. The 2-D periodic structure array of the proposed absorber is illustrated in Fig. 1(c). The numerical analysis is carried out by CST software which is based on the finite integration technique (FIT) method to solve Maxwell’s equations.

3. Results and Discussion

3.1. Methodology and absorption of the proposed unit cell: In the present work, the arrangement of the square ring-shaped resonator at the top of a dielectric spacer plays a crucial role in the optimization of PMA, which suggests that matched the impedance of metamaterial with free space impedance, i.e., $Z(\omega) = Z_0$. Eq.(3.1) helpsto calculate the absorption of the metamaterial absorber³².

(3.1) $A(\omega) = 1 - R(\omega) - T(\omega),$

where, $R(\omega)$ and $T(\omega)$ represents the reflectance and transmittancedepend on the scattering parameters i.e., $R(\omega) = |S_{11}(\omega)|^2$ and $T(\omega) = |S_{21}(\omega)|^2$. In the designed PMA, the bottom layer's thickness is considered more than the skin depth, so it works as a reflector in the applied region, and the transmitted waves cannot pass through the structure. Therefore, transmission $T(\omega)$ becomes approximately zero in the above equation (3.1). Therefore, Eq. (3.1) can be written as:

(3.2) $A(\omega) = 1 - R(\omega) - T(\omega) \text{ or } 1 - |S_{11}(\omega)|^2$

Fig.2(a) demonstrated the transmittance and reflectance with absorption for the given dimensions with gallium arsenide and tungsten. The proposed metamaterial absorber is shown broadband absorption while the transmittance is nearly zero and the reflectance is minimum. The proposed absorber has a 98% average absorption from 375 to 1100 nm regions. We also achieved three maximum peaks in the applied region, which are 441.80 nm, 506.88 nm, and 744.01 nm, respectively gives the maximum absorption values of 99.79%, 99.70%, and 99.94%. From 422 to 962 nm wavelength, the absorber has a >99% average absorption. Fig. 2(b) demonstrated the impedance matching conditions, where the real part of the impedance is around the unity and the imaginary part is approximately zero and makes a perfect absorber. From the parametric retrieval method³⁰, the normalized impedance can be calculated using the S-parameters by Eq. (3.3) This is a conventional equation for obtaining the effective impedance (real and imaginary).

$$(3.3) \quad Z_{eff} = \sqrt{\frac{(1+S_{11})^2 - S_{21}^2}{(1-S_{11})^2 - S_{21}^2}}$$

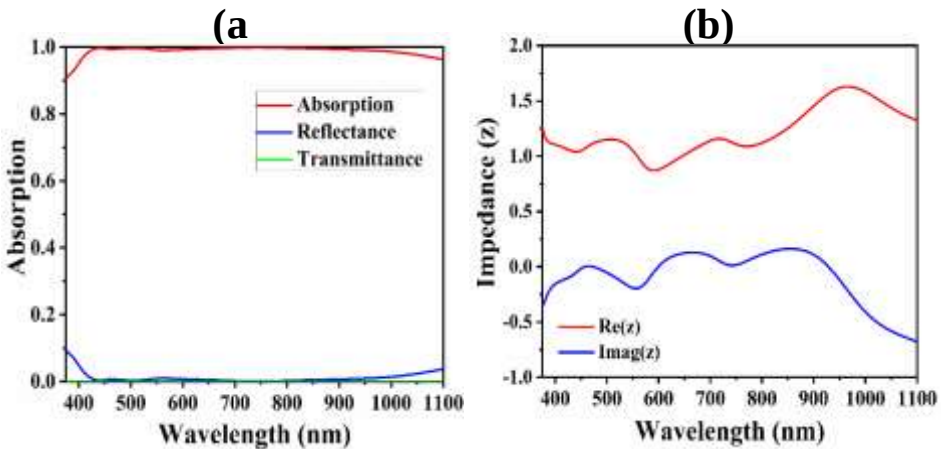


Figure 2. (a) Absorption spectra of PMA, (b) Effective impedance (Real and Imaginary) of the proposed absorber

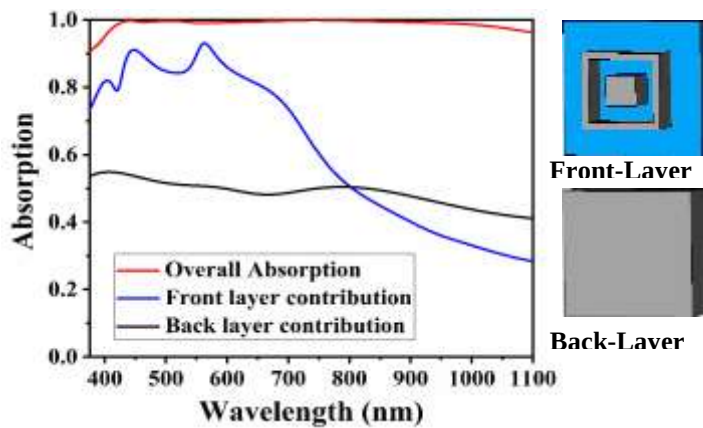


Figure 3. Absorption spectra withback-layer of tungsten metal, and front-layer (dielectric and resonator).

The design structure is separated into two layers to grasp the absorption characteristics. Metasurface (W) and the dielectric substrate (GaAs) made a frontlayer while the back layer consists only of the bottom layer of tungsten metal. The contribution of the absorption with the back-layer and the front-layer is represented in Fig.3. The average absorption of a frontlayer is 72.88 % while the average absorption of a back layer is 50.68%. The tungsten's back-layer has maximum absorption at the wavelength of 570.75 nm due to the intrinsic loss inside. The inductive and conductive properties of the resonators and lossless characteristics of the GaAs play a vital role in the absorption in the frontlayer. Therefore, the magnitude contributions of the absorption from both layers (back and front) is maximum, and it has shown the 98% average absorption which is the broadband absorption in this region, and shown as the red curve in figure 3.

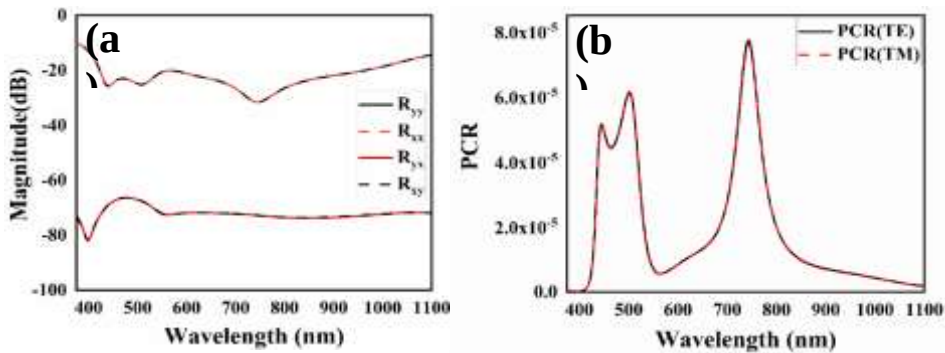


Figure 4. (a) Cross-polarization and Co-polarization components in magnitude (dB), (b) PCR for TE and TM mode.

However, when designing and simulating the metamaterial absorber (MMA), one question still arises: MMA must not work as a polarization converter. Always discuss the value of the polarization conversion ratio (PCR) instead of the absorption. The simulated symmetrical design method demonstrated the components of Cross-polarization and Co-polarization in Fig. (4) to diminishing that question. In the linear magnitude scale, the cross-polarization component is around zero, which confirms that the absorber did not convert the waves in the region.

$$(3.4) \quad |S_{11}(w)|^2 = |R_{yx}|^2 + |R_{yy}|^2$$

$$(3.5) \quad |S_{11}(w)|^2 = |R_{xy}|^2 + |R_{xx}|^2$$

Here, R_{yy} and R_{xx} are the co-polarization components, R_{xy} and R_{yx} are cross-polarization components. The value of PCR can be evaluated by Eq. (3.6) and (3.7) using linear values of R_{yy} , R_{xx} , R_{yx} , and R_{xy} exhibited in Fig. 4(b). For both TE and TM modes, the PCR values are near zero³⁰.

$$(3.6) \quad \text{PCR}_{\text{TE}} = (R_{yx}^2) / (R_{yx}^2 + R_{yy}^2)$$

$$(3.7) \quad \text{PCR}_{\text{TM}} = (R_{xy}^2) / (R_{xy}^2 + R_{xx}^2)$$

3.2. Parametric analysis of the unit cell: To observe the absorption characteristics, it is necessary to know the effect of the absorber's geometric parameters. For the absorption mechanism, the parameters of the structure such as periodicity (p), dielectric thickness (h_2), resonator thickness (t), and the resonator width (w) are very important, which report the variation of absorption spectra. Firstly, we examined the absorber's periodicity effect represented by the parameter (p) in Fig.5 (a). When sweeps the unit cell period, then all resonance peaks are more affected by the original peaks. It generates by the resonators because E-field and M-field were changing their positions. Therefore, if changed the periodicity, maximum absorptions are affected and show absorption somewhere high and low. We chose the possible period ($p = 610$ nm) for the metamaterial absorber to achieve the perfect absorption. We have also examined the thickness effect of the dielectric layer (GaAs) represented by the parameter (h_2). The dielectric layer thickness can modulate the resonance wavelength and absorption rate, as shown in Fig. 5(b). It mainly helps to the coupling between the resonators and the ground layer. Therefore, the magnetic response is generated by this coupling. Thus, the impedance matching of the absorber with the free space verified the electric and magnetic

distribution. So, the thickness of dielectric separation generates the magnetic response when the thickness is smaller and higher than 28 nm. This condition does not verify the impedance matching for some layer thickness. Therefore, the thickness is significant for considering the design of the absorber.

In the absorber design, the dimensions of resonators selection should be careful because it plays a crucial role in perfect absorption. The changes in the dimension of resonators affect the absorption spectrum while kept constant to the other parameters. The results with different dimensions are shown in Fig. 5(c). The red color indicates the desired results for maximum absorption. The optimum thickness is 170 nm required for the perfect absorption checking with other thickness parameters. So the absorption peak shifted when its thickness increases and decreases, and we need an ideal thickness of resonators to generate the perfect absorption and create suitable magnetic and electric resonances. As seen in Fig. 5(d), the resonance wavelength is also dependant on the width of resonators. So in this section, we have explained the width (w) of the square ring-shaped resonator. When sweeps the resonators' width, the absorption result varies with different wavelengths in the broadband region. However, the maximum peaks of the absorption at 441.80 nm, 506.88 nm, and 744.01 nm are strongly dependent on resonators' width that gives the electric and magnetic responses for the different results. Therefore, to find the perfect absorption, it is necessary to adjustment of the width. Thus, the square ring-shaped resonator at the same wavelength gives different absorption results with resonators' width. The best absorption results with width ($w = 60$ nm) at the described wavelength are shown in Fig. 5(d). Here is also shown the absorption with the various wavelength at the different thicknesses and widths of resonators. Therefore, the thickness of the dielectric layer and resonators, the dielectric layer's width, and the dimensions of resonators are very important to make a unit cell of metamaterial structure that gives the perfect absorption within wavelengths.

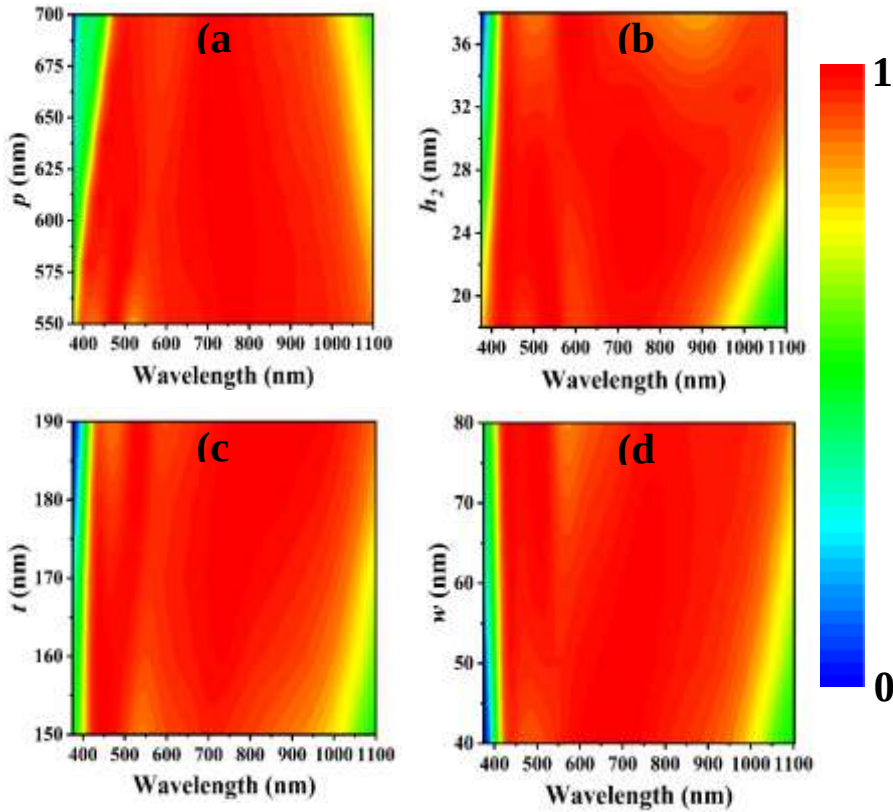


Figure 5. Absorption performances with structural parameters. (a) Period (P), (b) Thickness (h_2) of the dielectric, (c) Thickness (t) of the resonator, and (d) Width (w) of the ring-shaped resonator.

3.3. Polarization and incident angle Effect:

The analysis as mentioned above consigns to the absorbance characteristics of the incident EM waves at a normal angle. As we know that the light source is incident on the device at an oblique angle, and strong absorption with a large angle is valuable for design the absorber. To obtain the highperformance of the absorber, it is necessary to understand the influence of the incident angles for both TE and TM modes. The direction of the solar radiation changes every time, and some parts of the radiation incident on the unit cell in the form of unpolarized radiation. Thus, a convenient metamaterial unit cell design must operate for all the incident EM radiations for optimizing the absorption coefficient. Therefore, the absorption values of the proposed PMA must be independent for both TE and TM polarization radiation because the design is symmetrical, so all the absorption remains the same

for all the polarization angles. Thus, the simulated absorption results for both TE and TM waves at different polarisation angles are shown in Fig. 6(a), where the angles are changed from 0° - 80° at 20° intervals. The angle of polarization in the x-y plane for both cases can be defined as the angle variation. From the obtained result, it be can be seen that the polarization angle independent for TE and TM modes within the complete working in broadband. The polarization angle is very important for designing a metamaterial absorber because the required absorption is necessary for solar harvesting energy.Figures 6(c) and 6(d) show the contrast of light absorption for the different incident angles. In TE polarization, when the incident angles are more significant than 45° , the absorption efficiency is weakened, which shows approximately 90% absorption, because the magnetic field direction varies with incidence angle, due to which the strength of the magnetic resonant decreases. In the TE polarization case, the absorption bandwidth is above 95% up to 450 nm in the $420\text{-}1100\text{ nm}$ wavelength region, while the 90% absorption maintains the angles $450\text{-}600\text{ nm}$ in that region. The absorption bandwidth is increased with different incident angles compare to the TM polarization because the magnetic field held when changed the incident angles with resonant peaks. So, it's the best choice for sensing applications under the large incidence angles because it maintained broadband absorption in the Visible-NIR region.

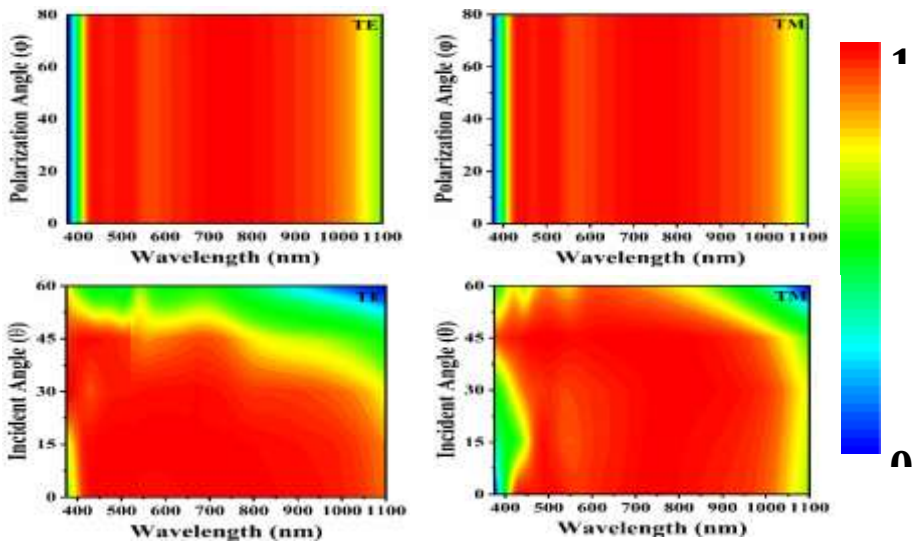


Figure 6. (a)-(b) Normal and oblique polarization angle from 0° - 80° , and (c)-(d) Normal and oblique incident angle from 0° - 60° for TE and TM modes, respectively.

3.4. Absorption with different dielectric materials:The bottom plane of the tungsten metal is replacing with other metals (Au, Ag, Al, and Cr) and compared the all absorption spectra without changing any thickness and dimensions²⁶. The simulated structure of PMA for selective metals reveals more significant results because it shows the coupling of surface Plasmon, which helps achieve perfect absorption. The responses of these absorbers for the Visible-NIR regime are plotted in Fig. 7(a). The absorber's optimized absorption with tungsten-based configurations is indicated in the plot, where the absorption of chromium (Cr) is close. Noble metals (Ag, Au, and Al) are not giving much more absorption than tungsten. We observed the ultra-thin dielectric spacer layer for the proposed absorber. In the proposed absorber, GaAs semiconductor is used with a high dielectric constant. Therefore, the ultra-thin GaAs layer is expected to be responsible for the absorption in the broadband region. When GaAs is replaced by the different dielectric spacer such as SiO₂, SiN, Si, and ITO, observed results are displayed in Fig. 7(b), and their comparisons are discussed here. The absorption intensity, high dielectric constant, and larger bandwidth are observed for the GaAs compared to the other dielectric spacer. Silicon (Si) gives a better absorption spectrum which is close to the GaAs. Significantly, the absorption and bandwidth decreased in the structure with decreased dielectric constant due to the limitation of fields and the significantly reduced excitation.

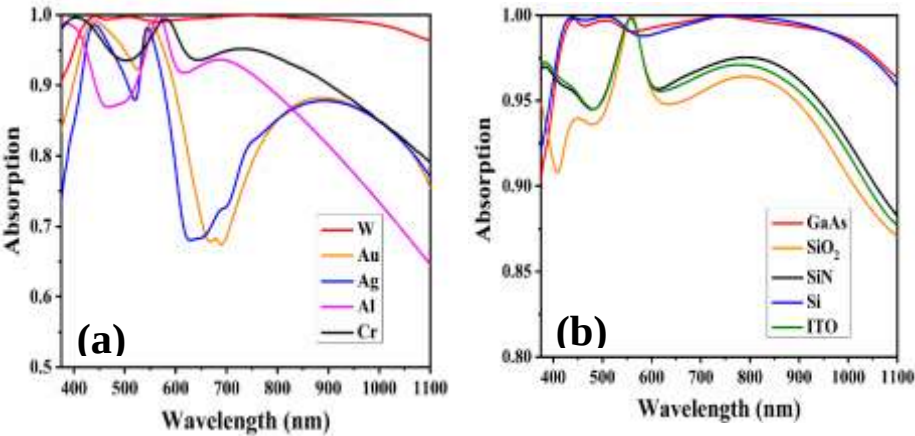


Figure 7. Absorption spectra of the absorber, (a) different metals of the bottom layer, and (b) different dielectric layers.

3.5. Comparative study: In Table 2, we have discussed the absorption features and display their comparisons with previous absorber design, wavelength range, dimensions, materials, and absorption level. Perfect

absorbers (Visible to NIR) are rarely found, operating the entire regions based on three layers. Moreover, we obtain a larger bandwidth than other absorbers and absorption, which is above 95% in this region. The main reasons for high absorption match the impedance of the bottom layer (tungsten). Nothing that the multiple-layers structures increase the sample size but also increases the cost, which is not conducive to its integrated development. In our proposed absorber, we have used the square ring-shaped, which improves the absorptivity compared to other structures. The active regions, number of layers, dimensions, absorption level, and peak absorption for different dielectric materials are tabulated in table 2.

Table 2. Comparison of the designed PMA with previously reported research papers.

Refs.	Range (nm)	Total layers	Dimensions (w*l*h) in nm	Materials	Absorption level	Peak absorptio n
[20]	262-709	Two	240*240*170	Au, Si	Above 90%	99.1%
[22]	389.34-697.19	Three	1000*1000*225	W, SiO ₂	Above 91.24%	99.99
[23]	430-1400	Three	90.5*690.5*410	Al, GaAs	Not a broadband absorber	Three peaks (99.99%)
[24]	437.9-578.3	Three	300*300*272	Au, SiO ₂ , Si	Above 80%	98.2%
[25]	430-850	Three	320*320*50	Au, SiO ₂	Above 90%	99%
[26]	400-850	Three	500*500*174	Al, SiO ₂	Not a broadband absorber	Two peaks (92% & 99.99%)
This work	375-1100	Three	610*610*398	W, GaAs	Above 90%	99.94%

3.6. Constitutive electromagnetic parameters retrieval: The constitutive EM parameters viz., magnetic susceptibility (χ_{ms}), and electric susceptibility (χ_{es}) can be evaluated from Eq. (3.8) and (3.9) with a co-polarized reflection coefficient³¹. Here, d is the thickness of the spacer layer, and k_0 is the wavenumber. This method is used for the extraction of constitutive parameters, which do not involve the S_{21} parameters. The extracted parts (imaginary and real) of effective permittivity (ϵ_{eff}) and effective permeability (μ_{eff}) are can be calculated by Eq. (3.10) and (3.11) which are demonstrated in Fig.8 (a) and 8(b), respectively:

(3.8)
$$\chi_{es} = \frac{2j1 - S_{11}}{k_01 + S_{11}}$$

$$(3.9) \quad \chi_{es} = \frac{2j1 + S_{11}}{k_0 1 - S_{11}}$$

$$(3.10) \quad \varepsilon_{eff} = 1 + \frac{\chi_{es}}{d}$$

$$(3.11) \quad \mu_{eff} = 1 + \frac{\chi_{ms}}{d}$$

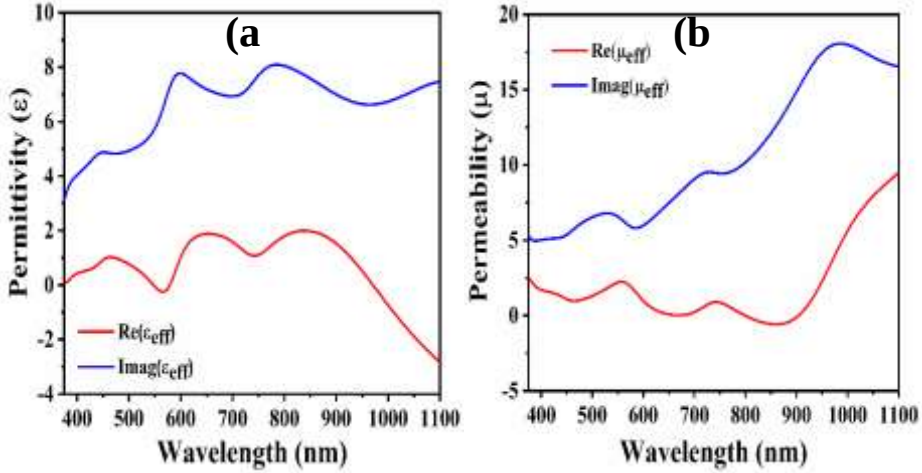


Figure 8. Extracted constitutive electromagnetic parameters of the absorber, (a) real and imaginary permittivity, and (b) real and imaginary permeability

3.7. Performance evaluation of conversion efficiency and short circuit current density: Various structure of absorber shows the different absorption under the solar spectrum ($A_{AM1.5}$) of the solar cell. The high conversion efficiency represents the large value of $A_{AM1.5}$ as shown in Fig. 9. The proposed absorber provides the broadband absorbance in the spectrum from the visible to near-IR region. We used this expression to obtain the $A_{AM1.5}$ of a solar cell,

$$(3.12) \quad A_{AM1.5} = \frac{\int_{375nm}^{1100nm} A(\lambda)G(\lambda)d\lambda}{\int_{375nm}^{1100nm} G(\lambda)d\lambda},$$

where $A(\lambda)$ and $G(\lambda)$ represent the absorption of absorber and photon numbers of distribution as a function of wavelength in the solar irradiance

(AM1.5) is given as $G(\lambda)=w(\lambda)/E(\lambda)$, where $E(\lambda)$ and $w(\lambda)$ is photon energy and solar irradiance³⁰. Table. 3, represent the evaluated values of $A_{AM1.5}$ with the various thickness (h_2) of a dielectric layer of GaAs corresponding to Fig. 9. We achieved the larger value of $A_{AM1.5} \sim 99.11\%$ for $h_2 = 28$ nm, which indicates the high conversion efficiency of a solar cell.

Table 3. $A_{AM1.5}$ with different thickness (h_2) of GaAs layer

Thickness (h_2)	13 nm	18 nm	23 nm	28 nm	33 nm	42 nm
$A_{AM1.5}$ (%)	96.84 %	98.07%	98.88%	99.11%	98.74%	97.80%

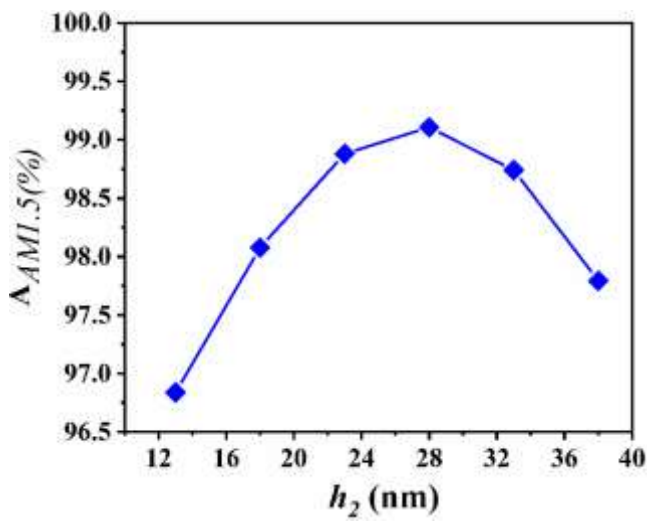


Figure 9.The conversion efficiency ($A_{AM1.5}$) with the various thickness (h_2) of the dielectric layer

The short-circuit current density (J_{sc}) is also playing a crucial role along with conversion efficiency for solar cells. Fig. 10(a) shown a J_{sc} with different thicknesses of the GaAs layer. The electron-hole pairs generated by each absorbed photon, so J_{sc} can be calculated by this expression under the solar illumination,

(3.13)

$$J_{sc} = \frac{e}{hc} \int_{375nm}^{1100nm} \lambda \phi_{AM1.5}(\lambda) A(\lambda) d\lambda ,$$

where, e , h , c , and λ are electron charge, Plank constant, speed of light, and operating wavelength, respectively. $A(\lambda)$ and $\Phi_{AM1.5}(\lambda)$ are absorptions of the absorber and solar irradiance. Here, we considering the 100% internal quantum efficiency. When the thickness (h_2) of the GaAs layer is tuned from 13 nm to 38 nm with an interval of 5 nm, J_{sc} is continuously affected with different thicknesses because J_{sc} strongly depends on the resonant modes number in operating wavelength. Table. 4, represent the different values of J_{sc} with the thickness (h_2). For $h_2 = 28$ nm, J_{sc} achieved a high value (41.28 mA/cm^2) that is much larger with reported work^{27, 32, 33}.

Table 4. J_{sc} with different thickness (h_2) of GaAs layer

Thickness (h_2)	13 nm	18 nm	23 nm	28 nm	33 nm	42 nm
$J_{sc}(\text{mA/cm}^2)$	40.34	40.85	41.18	41.28	41.13	40.73

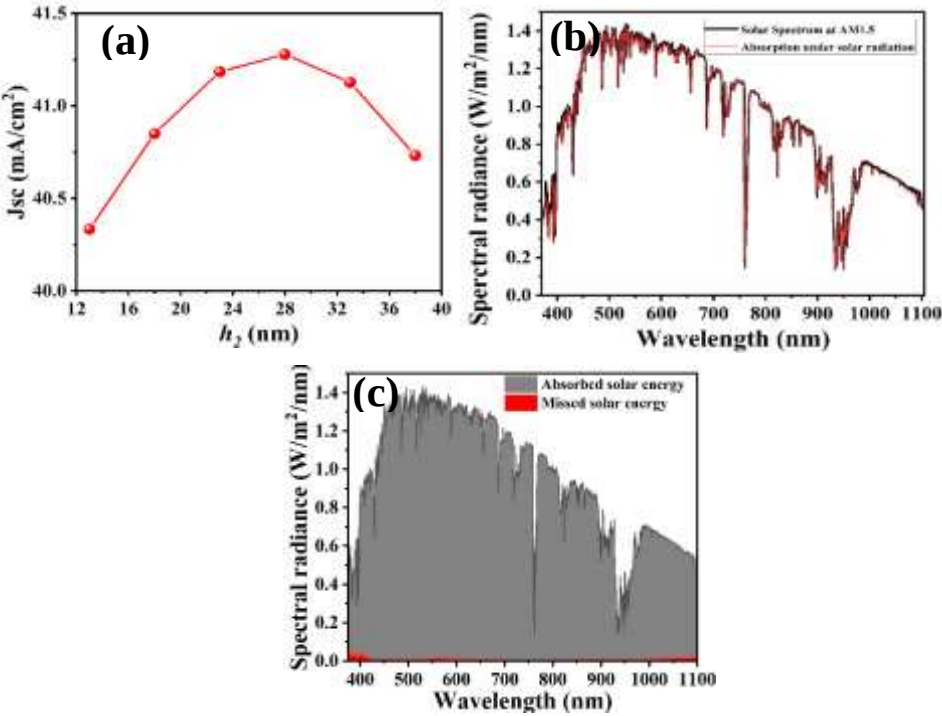


Figure 10. (a) Calculated short circuit current density (J_{sc}) with different thickness (h_2) of GaAs layer, (b) Absorbed energy of proposed absorber in AM1.5 solar spectrum, (c) Absorbed solar energy and missed solar energy in the applied range of solar radiance.

The response of absorber absorption is usually used to calculate the collection of solar energy. The wide bandwidth of wavelength and near-

unity absorbance mainly present the ideal absorber. We investigated the illumination of the solar absorption of the absorber under the AM1.5 source in Fig. 10(b). The absorbed solar energy and the missed solar energy of the presented absorber are also calculated shown as in Fig. 10(c). This absorber has perfect absorption so the light capture efficiency is very high. Therefore it shows very low missed solar energy. The multiple resonance coupling is responsible to achieve the perfect absorption in the broadband wavelength range²¹. Therefore, the strong resonance absorption of solar cells can be used the solar harvesting, solar cell, thermal emission-related potential applications.

4. Conclusions

In this paper, the broadband and highly efficient tungsten-based nano-absorber has been investigated. The proposed absorber has higher stability with a square ring-shaped nanostructure in terms of higher melting temperature, spectrum, and efficiency. The symmetrical geometry of the top layer makes it polarization insensitive. Significant impedance matching achieves the effective absorption for this design which can also exhort the resonance front-layer and intrinsic loss in the back-layer. The proposed PMA demonstrates nearly perfect absorption of over 98% in the broadband region (375-1100nm). We have observed high absorption bands at the wavelengths 441.80 nm, 506.88 nm, and 744.01 nm, where absorption is greater than 99%. The absorption band's position and amplitude can be tuned with resonators' parameters and the constituted dielectric layer's thickness. We have also studied the effects of polarization angles and incident angles for both TM and TE modes. The proposed absorber holds the solar cell application because improved conversion efficiency ($A_{AM1.5}$) is very large. Moreover, it has a large short circuit current density (41.28 mA/cm^2) and also obtained the near-unity solar due to multiple coupling of resonances in the broadband range. Therefore proposed absorber opens a new door in the visible to near-infrared wavelength region paradigm to design multiple potential applications. Solar energy, thin-film solar cell, and solar harvesting applications.

Acknowledgment: One of the authors (Raj Kumar) is thankful to The University Grants Commission (UGC), India for providing the junior research fellowship. Bipin K. Singh is thankful to The University Grants Commission (UGC), India, for providing financial support in the form of Dr. D. S. Kothari Postdoctoral Fellowship.

References

1. N. I. Landy, S. Sajuyigbe, J. J. Mock, D. R. Smith and W. J. Padilla, Perfect metamaterial absorber, *Physical review letters*, **100(20)** (2008), 207402.
2. D. R. Smith, Willie J. Padilla, D. C. Vier, Syrus C. Nemat-Nasser and Seldon Schultz, Composite medium with simultaneously negative permeability and permittivity, *Physical review letters*, **84(18)** (2000), 4184.
3. M. M. Hasan, M. R. I. Faruque and M. T. Islam, Dual band metamaterial antenna for LTE/bluetooth/WiMAX system, *Scientific Reports*, **8(1)** (2018), 1-17.
4. J. Y. Suen., K. Fan, J. Montoya, C. Bingham, V. Stenger, S. Sriram and W. J. Padilla, Multifunctional metamaterial pyroelectric infrared detectors, *Optica*, **4(2)** (2017), 276-279.
5. R. Melik, E. Unal, N. K. Perkgoz, C. Puttlitz and H. V. Demir, Metamaterial-based wireless strain sensors, *Applied Physics Letters*, **95(1)** (2009) 011106.
6. Y. Cheng and C. Du, Broadband plasmonic absorber based on all silicon nanostructure resonators in visible region, *Optical Materials*, **98** (2019), 109441.
7. P. Zhu and L. Jay Guo, High performance broadband absorber in the visible band by engineered dispersion and geometry of a metal-dielectric-metal stack, *Applied Physics Letters*, **101(24)** (2012), 241116.
8. X. Niu, D. Qi, X. Wang, Y. Cheng, F. Chen, B. Li and R. Gong, Improved broadband spectral selectivity of absorbers/emitters for solar thermophotovoltaics based on 2D photonic crystal heterostructures, *JOSA A*, **35(11)** (2018), 1832-1838.
9. C. Shemelya, D. DeMeo, N. P. Latham, X. Wu, C. Bingham, W. Padilla and T. E. Vandervelde, Stable high temperature metamaterial emitters for thermophotovoltaic applications, *Applied Physics Letters*, **104(20)** (2014), 201113.
10. Z. Zhao, J. Wang, C Xu, K. Yang, F Zhao, K Wang, X. Zhang and F. Zhang, Photomultiplication type broad response organic photodetectors with one absorber layer and one multiplication layer, *The Journal Of Physical Chemistry Letters*, **11(2)** (2019), 366-373.
11. C. Li, H. Fan, Q. Dai, Z. Wei, S. Lan and H. Liu, Multipole resonance in arrays of diamond dielectric: A metamaterial perfect absorber in the visible regime, *Nanomaterials*, **9(9)** (2019), 1222.
12. Y. Cheng and C. Du, Broadband plasmonic absorber based on all silicon nanostructure resonators in visible region, *Optical Materials*, **98** (2019), 109441.
13. Sultan Mahmud, Sikder Sunbeam Islam, Kamarulzaman Mat, Muhammad E. H. Chowdhury, Hatem Rmili and Mohammad Tariqul Islam, Design and parametric analysis of a wide-angle polarization-insensitive metamaterial absorber with a star shape resonator for optical wavelength applications, *Results in Physics*, **18** (2020), 103259.

14. M. J. Hossain, M. R. I. Faruque, M. R. Ahmed, M. J. Alam and M. T. Islam, Polarization-insensitive infrared-visible perfect metamaterial absorber and permittivity sensor, *Results in Physics*, **14** (2019), 102429.
15. W. Zhu, F. Xiao, I. D. Rukhlenko, J. Geng, X. Liang, M. Premaratne and R. Jin, Wideband visible-light absorption in an ultrathin silicon nanostructure, *Optics Express*, **25**(5) (2017), 5781-5786.
16. M. H. Heidari and S. H. Sedighy, Broadband wide-angle polarization-insensitive metasurface solar absorber, *JOSA A*, **35**(4) (2018), 522-525.
17. H. Xu, L. Hu, Y. Lu, J. Xu and Y. Chen, Dual-band metamaterial absorbers in the visible and near-infrared regions, *The Journal of Physical Chemistry C*, **123**(15) (2019), 10028-10033.
18. M. K. Hedayati, A. U. Zillohu, T. Strunskus, F. Faupel and M. Elbahri, Plasmonictunable metamaterial absorber as ultraviolet protection film, *Applied Physics Letters*, **104**(4) (2014), 041103.
19. Y. Li, Z. Liu, P. Pan, X. Liu, G. Fu, Z. Liu, H. Luo and G. Liu, Semiconductor-nanoantenna-assisted solar absorber for ultra-broadband light trapping, *Nanoscale research letters*, **15** (2020), 1-6.
20. C. Shemelya, D. DeMeo, N. P. Latham, X. Wu, C. Bingham, W. Padilla and T. E. Vandervelde, Stable high temperature metamaterial emitters for thermophotovoltaic applications, *Applied Physics Letters*, **104**(20) (2014), 201113.
21. Y. Cui, Y. He, Y. Jin, F. Ding, L. Yang, Y. Ye, S. Zhong, Y. Lin and S. He, Plasmonic and metamaterial structures as electromagnetic absorbers, *Laser & Photonics Reviews*, **8**(4) (2014), 495-520.
22. P. Rufangura and C. Sabah, Polarisation insensitive tunable metamaterial perfect absorber for solar cells applications, *IET Optoelectronics*, **10**(6) (2016), 211-216.
23. P. Rufangura and Cumali Sabah, Dual-band perfect metamaterial absorber for solar cell applications, *Vacuum*, **120** (2015), 68-74.
24. M. J. Hossain, M. R. I. Faruque and M. T. Islam, Correction: Perfect metamaterial absorber with high fractional bandwidth for solar energy harvesting, *Plos one*, **14**(1) (2019), e0211751.
25. R. Kumar, B. K. Singh and P. C. Pandey, Study of Gallium Arsenide Based Perfect Metamaterial Absorber in the Broadband Region, In 2020 IEEE 17th India Council International Conference (INDICON), *IEEE*, (2020), 1-4.
26. A. D. Khan, A. D. Khan, S. D. Khan and M. Noman, Light absorption enhancement in tri-layered composite metasurface absorber for solar cell applications, *Optical Materials*, **84** (2018), 195-198.
27. S. Wu, Y. Ye, M. Luo, L. Chen, Ultrathin omnidirectional, broadband visible absorbers, *JOSA B*, **35**(8) (2018), 1825-1828.
28. P. Rufangura, C. Sabah, Polarization angle insensitive dual-band perfect metamaterial absorber for solar cell applications, *Physica Status Solidi (c)*, **12**(9-11) (2015), 1241-1245.

29. E. D. Palik, *ed. Handbook of optical constants of solids*, Vol. 3. Academic press, 1998.
30. D. R. Smith, D. C. Vier, ThKoschny and C. M. Soukoulis, Electromagnetic parameter retrieval from inhomogeneous metamaterials, *Physical review E*, **71(3)** (2005), 036617.
31. S. K. Ghosh, V. S. Yadav, S. Bhattacharyya and S. Das, A graphene based bandwidth enhanced metamaterial absorber using circular ring, In 2018 IEEE International Symposium on Antennas and Propagation & USNC/URSI National Radio Science Meeting, *IEEE*, (2018), 1491-1492,.
32. X. Meng, E. Drouard, G. Gomard, R. Peretti, A. Fave and C. Seassal, Combined front and back diffraction gratings for broad band light trapping in thin film solar cell, *Optics Express*, **20(105)** (2012), A560-A571.
33. H. Li, Y. Hu, Y. Yang and Y. Zhu, Theoretical investigation of broadband absorption enhancement in a-Si thin-film solar cell with nanoparticles, *Solar Energy Materials and Solar Cells*, **211** (2020), 110529.